

SPECIFICATIONS

Winch model: Axon 35 or Axon 35-S

Part numbers: 101135 (AXON 35), 101130 (AXON 35-S)

Rated line pull: 3500 Lbs. (1588 kg) single-line

Motor: 12V DC permanent magnet

Sealing: IP68 waterproof

Geartrain: 3-stage planetary

Fasteners: All stainless steel

Rope: AXON 35: 50' x 7/32" (15m x 6.3mm) steel,
AXON 35-S: 50' x 3/16" (15m x 4.8mm) Spydura synthetic

Hook: Black powder coat

Fairlead: AXON 35: Roller, AXON 35-S: EPIC hawse fairlead

Primary Control: Rockerbar digital control switch
with handlebar mount adaptor

Remote Control: Sold Separately

Brake: Mechanical brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs. (kg)	Ft./min. (M/min.)	Current	layer/Lbs. (kg)
0	20.2 (6.2)	35 amps	1/3500 (1588)
500 (227)	17.8 (5.4)	58 amps	2/2934 (1331)
1000 (454)	15.8 (4.8)	81 amps	3/2525 (1145)
1500 (680)	14.2 (4.3)	105 amps	4/2216 (1005)
2000 (907)	12.9 (3.9)	129 amps	5/1975 (896)
2500 (1134)	11.8 (3.6)	154 amps	
3000 (1361)	10.7 (3.2)	178 amps	
3500 (1588)	9.5 (2.9)	204 amps	

DIMENSIONS

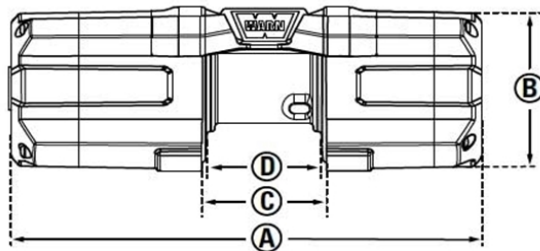

A 13.31" (338.1mm)	C 3.47" (88.3mm)
B 4.80" (122mm)	D 3.30" (83.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76mm x 124mm)