

## SPECIFICATIONS

**Winch model:** VRX 25 or VRX 25-S

**Part numbers:** 101025 (VRX 25), 101020 (VRX 25-S)

**Rated line pull:** 2500 Lbs. (1134 kg) single-line

**Motor:** 12V DC permanent magnet

**Sealing:** IP68 waterproof

**Geartrain:** 3-stage planetary

**Fasteners:** All stainless steel

**Rope:** VRX 25: 50' x 3/16" (15m x 4.8mm) steel,  
VRX 25-S: 50' x 3/16" (15m x 4.8mm) synthetic

**Hook:** Zinc plated

**Fairlead:** VRX 25: Roller, VRX 25-S: Cast aluminum hawse

**Primary Control:** Handlebar-mounted rocker switch

**Remote Control:** Sold Separately

**Brake:** Mechanical brake


**Mechanical Warranty:** Limited lifetime

**Electrical Warranty:** 3 year

## 12V DC PERFORMANCE SPECS (first layer)

Line Pull Lbs. (kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs. (kg)
0	17.5 (5.3)	20 amps	1/2500 (1134)
500 (227)	14.3 (4.3)	45 amps	2/2141 (971)
1000 (454)	12.0 (3.6)	71 amps	3/1872 (849)
1500 (680)	9.9 (3.0)	98 amps	4/1663 (754)
2000 (907)	8.0 (2.4)	128 amps	5/1496 (679)
2500 (1134)	6.8 (2.1)	159 amps	

## DIMENSIONS

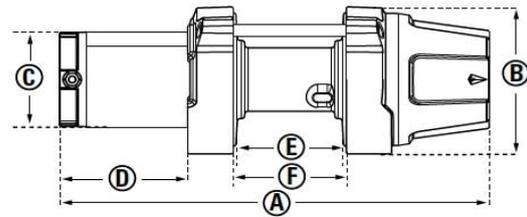

<b>A</b> 13.2" (335.3mm)	<b>D</b> 3.94" (100.2mm)
<b>B</b> 4.74" (120.5mm)	<b>E</b> 3.30" (83.9mm)
<b>C</b> 3.07" (78 mm)	<b>F</b> 3.5" (88.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76mm x 124mm)