

SPECIFICATIONS

Winch model: VRX 35 or VRX 35-S

Part numbers: 101035 (VRX 35), 101030 (VRX 35-S)

Rated line pull: 3500 Lbs. (1588 kg) single-line

Motor: 12V DC permanent magnet

Sealing: IP68 waterproof

Geartrain: 3-stage planetary

Fasteners: All stainless steel

Rope: VRX 35: 50' x 7/32" (15m x 5.5mm) steel,
VRX 35-S: 50' x 3/16" (15m x 4.8mm) synthetic

Hook: Zinc Plated

Fairlead: VRX 35: Roller, VRX 35-S: Cast aluminum hawse

Primary Control: Handlebar-mounted rocker switch

Remote Control: Sold Separately

Brake: Mechanical brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull Lbs. (kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs. (kg)
0	15.8 (4.8)	20 amps	1/3500 (1588)
500 (227)	13.4 (4.1)	41 amps	2/2934 (1331)
1000 (454)	11.2 (3.4)	60 amps	3/2525 (1145)
1500 (680)	9.3 (2.8)	79 amps	4/2216 (1005)
2000 (907)	7.6 (2.3)	100 amps	5/1975 (896)
2500 (1134)	6.2 (1.9)	124 amps	
3000 (1361)	5.0 (1.5)	155 amps	
3500 (1588)	4.0 (2.1)	192 amps	

DIMENSIONS

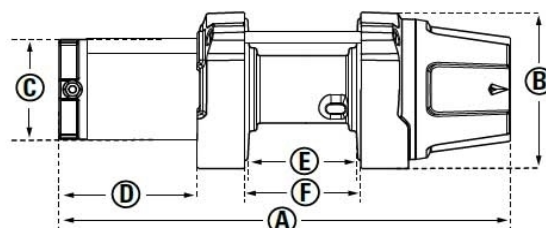

A 13.36" (339.4mm)	D 4.10" (104.3mm)
B 4.74" (120.5mm)	E 3.30" (83.9mm)
C 3.07" (78 mm)	F 3.476" (88.3mm)

Mounting bolt pattern: 3.0" x 4.87" (76mm x 124mm)