

SPECIFICATIONS

Winch model: VRX 45 or VRX 45-S

Part numbers: 101045 (VRX 45), 101040 (VRX 45-S)

Rated line pull: 4500 Lbs. (2041 kg) single-line

Motor: 12V DC permanent magnet

Sealing: IP68 waterproof

Geartrain: 3-stage planetary

Fasteners: All stainless steel

Rope: VRX 45: 50' x 1/4" (15m x 6.3mm) steel,
VRX 45-S: 50' x 1/4" (15m x 6.3mm) synthetic

Hook: Zinc Plated

Fairlead: VRX 45: Roller, VRX 45-S: Cast aluminum fairlead

Primary Control: Dash-mounted control switch

Remote Control: Corded remote

Brake: Mechanical brake


Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

12V DC PERFORMANCE SPECS (first layer)

Line Pull Lbs. (kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs. (kg)
0	16.2 (4.9)	20 amps	1/4500 (2041)
500 (227)	14.1 (4.3)	44 amps	2/3749 (1700)
1000 (454)	12.2 (3.7)	69 amps	3/3212 (1457)
1500 (680)	10.5 (3.2)	94 amps	4/2810 (1275)
2000 (907)	9.0 (2.7)	119 amps	
2500 (1134)	7.7 (2.3)	145 amps	
3000 (1361)	6.5 (2.0)	171 amps	
3500 (1588)	5.6 (1.7)	198 amps	
4000 (1814)	4.9 (1.5)	225 amps	
4500 (2041)	4.3 (1.3)	252 amps	

DIMENSIONS

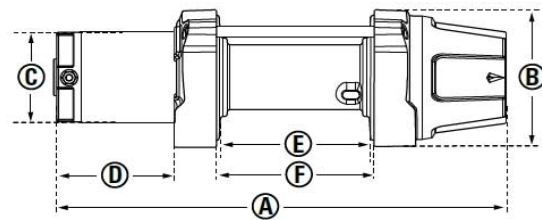

A 14.96" (380.2mm)	D 3.99" (101.4mm)
B 4.74" (120.5mm)	E 5.02" (127.6mm)
C 3.15" (80 mm)	F 5.19" (132mm)

Mounting bolt pattern: 3.0" x 6.59" (76.2mm x 167.4mm)